




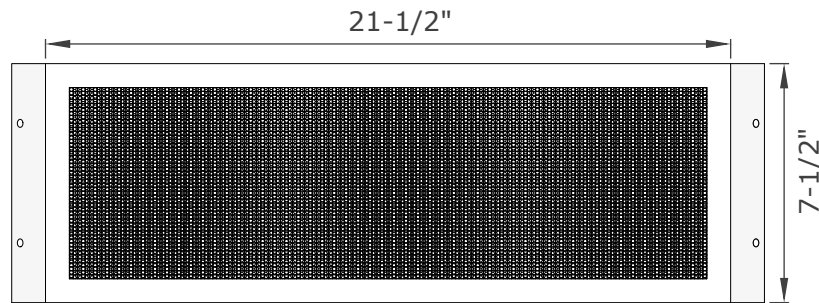


TOP VIEW

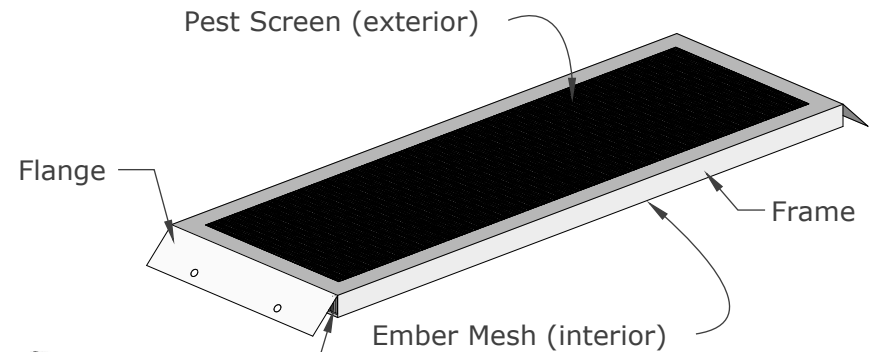


ISOMETRIC VIEW



Intumescent Core

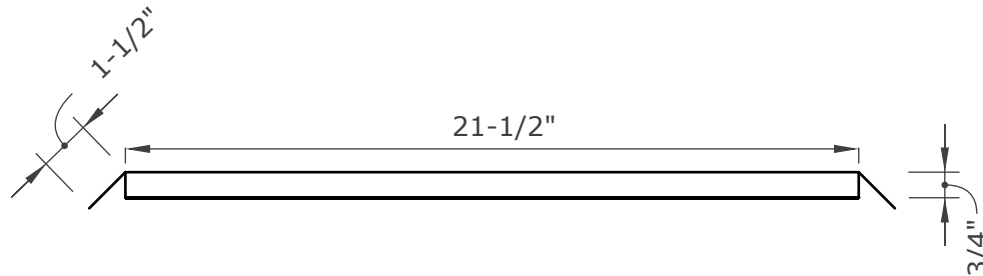

SIDE VIEW

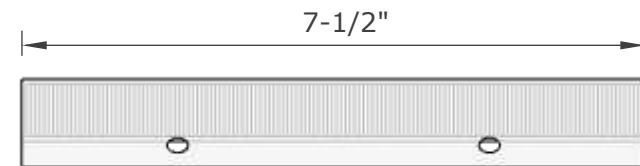

END VIEW (X-Ray)

Required Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVE7522RT PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:

NEW CAL
METALS INC.
www.newcalmetals.com

Model Description	Eave Vent	Flange Type	Standard	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVE7522RT	NFVA	119 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	21-1/2" x 7-1/2"			Ember Mesh	14 Mesh - 304 Stainless Steel (Faces interior)
				Pest Screen	Stainless Steel Screen - 1/8" (Faces exterior)